


## attaching frame to Jogger





3. Locate upright on Jogger. Remove existing bolt from upright using an adjustable wrench.

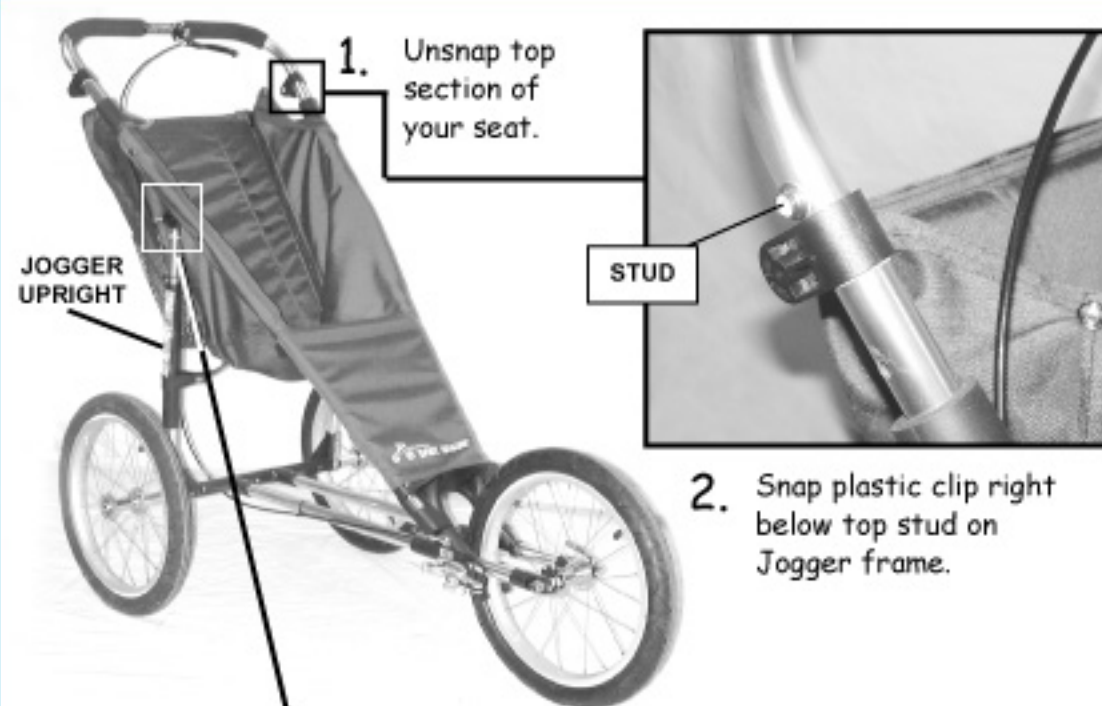

4. Now, attach car seat adapter bar and secure with bolt that came with accessory. Once attached, it should look like this.

## the final steps....

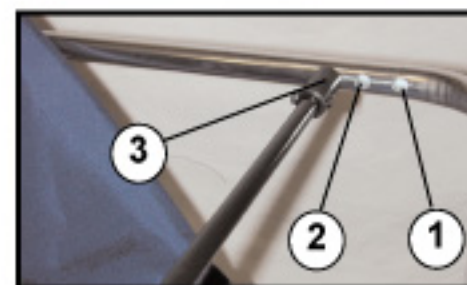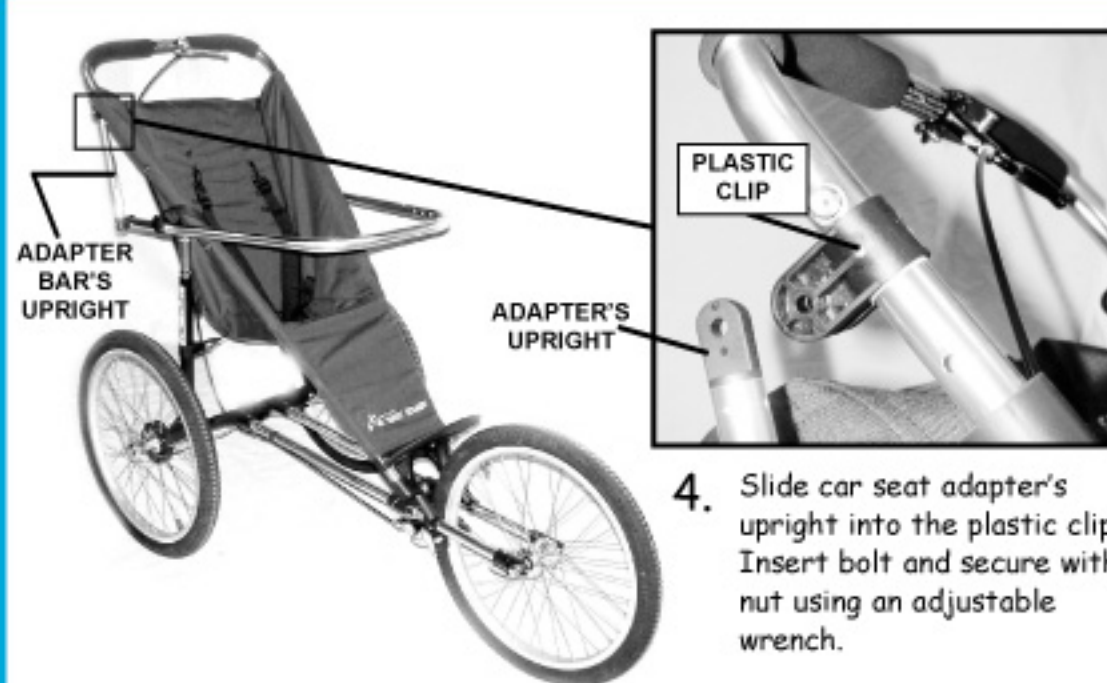

5. Finally place car seat in Jogger and secure with attached straps. Click cross bar into the appropriate hole on the car seat adapter bar. Number 1 is for Graco, 2 for some Evenflo and 3 for Century & Evenflo car seats.